

10/30/98

09132668 103098

Please type a plus sign (+) inside this box → ☐

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

| | | | | |
|---|--|---------|-------------|----|
| UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small> | Attorney Docket No. | 71516-2 | Total Pages | 13 |
| | First Named Inventor or Application Identifier | | | |
| | Pirmin ROMBACH et al. | | | |
| | Express Mail Label No. | | | |

| | |
|---|--|
| APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small> | ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231 |
| <div>1. <input type="checkbox"/> Fee Transmittal Form <small>(Submit an original, and a duplicate for fee processing)</small></div> <div>2. <input checked="" type="checkbox"/> Specification <small>[Total Pages 9]</small> <small>(preferred arrangement set forth below)</small><ul style="list-style-type: none">- Descriptive title of the invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the invention- Brief Summary of the invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure</div> <div>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) <small>[Total Sheets 1]</small></div> <div>4. Oath or Declaration <small>[Total Pages 1]</small><ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <small>(for continuation/divisional with Box 17 completed)</small> <small>[Note Box 5 below]</small><ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</div> <div>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</div> <div>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</div> <div>7. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small><ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies</div> | |
| ACCOMPANYING APPLICATION PARTS <div>8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</div> <div>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small></div> <div>10. <input type="checkbox"/> English Translation Document (if applicable)</div> <div>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</div> <div>12. <input type="checkbox"/> Preliminary Amendment</div> <div>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small></div> <div>14. <input type="checkbox"/> Small Entity <input type="checkbox"/> Statement filed in prior application, Status still proper and desired</div> <div>15. <input type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small></div> <div>16. <input checked="" type="checkbox"/> Other: Identification of Inventors</div> | |

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

| | | | | | |
|---------|--------------------------------------|-----------|--------------|----------|--------------|
| NAME | John P. DeLuca | | | | |
| | Watson Cole Grindle Watson, P.L.L.C. | | | | |
| ADDRESS | 1400 K St., NW, 10th floor | | | | |
| | | | | | |
| CITY | Washington | STATE | DC | ZIP CODE | 20005-2477 |
| COUNTRY | U.S.A. | TELEPHONE | 202-628-3600 | FAX | 202-628-3650 |

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/29 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

| CLAIMS | (1) FOR | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE | (5) CALCULATIONS |
|--------|--|------------------|------------------|-------------------------------|------------------|
| | TOTAL CLAIMS (37 CFR 1.16(c)) | 8 -20 = | | x \$ _____ = | \$ _____ |
| | INDEPENDENT CLAIMS (37 CFR 1.16(b)) | 1 -3 = | | x \$ _____ = | \$ _____ |
| | MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d)) | | | + \$ _____ = | \$ _____ |
| | | | | BASIC FEE (37 CFR 1.16(a)) | 790.00 |
| | | | | Total of above Calculations = | 790.00 |
| | Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28). | | | | |
| | TOTAL = | | | | 790.00 |

6. Small entity status:

- a. ☐ A small entity statement is enclosed.
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
c. ☐ Is no longer claimed.

7. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. _____:

- a. ☐ Fees required under 37 CFR 1.16.
b. ☐ Fees required under 37 CFR 1.17.
c. ☐ Fees required under 37 CFR 1.18. NO FEES PAID AT THIS TIME.

8. ☐ A check in the amount of \$ _____ is enclosed.

9. ☐ Other: _____

NOTE:

*The prior application's correspondence address will carry over to this CPA
UNLESS a new correspondence address is provided below.*

10. NEW CORRESPONDENCE ADDRESS


☐ Customer Number or Bar Code Label

or ☐ New correspondence address below

(Insert Customer No. or Attach bar code label here)

| | | | | | |
|---------|--------------------------------------|-----------|--------------|----------|--------------|
| NAME | John P. DeLuca | | | | |
| | Watson Cole Grindle Watson, P.L.L.C. | | | | |
| ADDRESS | 1400 K St., NW, 10th floor | | | | |
| | | | | | |
| CITY | Washington | STATE | DC | ZIP CODE | 20005-2477 |
| COUNTRY | U.S.A. | TELEPHONE | 202-628-3600 | FAX | 202-628-3650 |

11. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

| | |
|-----------|---|
| NAME | John P. DeLuca, Reg. No. 25,505 |
| SIGNATURE |  |
| DATE | October 30, 1998 |

**TITLE: SOLID STATE SILICON-BASED CONDENSER
MICROPHONE**

IDENTIFICATION OF INVENTORS:

All of the inventors in this new application are identified below:

1. Pirmin ROMBACH of Engelsborgvej 25 st. th., DK-2800
Lyngby, Denmark
Citizenship: Danish
2. Matthias MÜLLENBORN of Lyngby Rosenvaenge 23, DK-2800
Lyngby, Denmark
Citizenship: Danish
3. Ole HANSEN of Sjaelsmarksvej 20, DK-2970 Hørsholm,
Denmark
Citizenship: Danish
4. Matthias HESCHEL of Nørgaardsvej 22D, 2. th., DK-2800
Lyngby, Denmark
Citizenship: Danish
5. Siebe BOUWSTRA of Praestevaenget 25, DK-3400 Hillerød,
Denmark
Citizenship: Danish
6. Maja AMSKOV GRAVAD of Lundegårdshagnet 70, DK-4000
Roskilde, Denmark
Citizenship: Danish
7. Henrik Laurids HVIMS of Geelsvej 1, DK-2840 Holte,
Denmark
Citizenship: Danish

SECRET-8392ET60

Solid state silicon-based condenser microphone

Field of the invention

This invention related to miniature condenser microphones, and in particular to solid state silicon-based condenser microphones incorporating an integrated electronic circuit for transducer signal conditioning. Such miniature microphones are suitable for use in miniature electroacoustic devices such as hearing instruments.

10

Background of the invention

In the hearing instruments industry one of the primary goals is to make hearing instruments of small size while still maintaining good electroacoustic performance and operability giving good user friendliness and satisfaction. Technical performance data comprise such as sensitivity, stability, compactness, robustness and insensitivity to electromagnetic interference and to other external and environmental conditions. In the past, several attempts have been made to make microphones smaller while still maintaining good technical performance data.

EP 561 566 discloses a solid state condenser microphone having a transducer chip and, on the same chip, an electronic circuit and a cavity forming an opening or sound inlet for the transducer. The techniques and processes for manufacturing such electronic circuitry are quite different from the techniques and processes used in manufacturing the transducer elements. Consequently a chip having both an electronic circuit and an opening therein requires two (or possibly more) separate stages of production, usually at different facilities.

Summary of the invention

The invention provides a solid state silicon-based condenser microphone which is suitable for batch production.

SECRET

Several silicon chips are stacked, and the subsequent dicing of the stacked chips or discs is easier than with the prior art.

5 The invention makes it possible to make a very well defined sound inlet, which can optionally be covered with a sealing film or a filter preventing dust, moisture and other impurities from contaminating or obstructing the interior and the sound inlet of the microphone. A sound
10 inlet can theoretically be made as an opening in any of the chip surfaces including the fractures after dicing, but in practice the fractures are irregular surfaces and therefore less suitable for supporting a sealing film or a filter, since the irregular fractures could give rise
15 to the sealing film or a filter becoming wrinkled and having leakages at its periphery where it is secured to the die surface. A microphone according to the invention has an opening forming a sound inlet in the practically perfectly flat and polished faces of the wafer on which
20 several individual microphones are arranged.

An integrated electronic circuit chip can be arranged on the same plane surface, which is perfectly suited for flip-chip mounting the electronic circuit chip.

25 An intermediate chip is arranged between the electronic circuit chip and the transducer chip. The intermediate chip has another opening with feedthrough electrical connections on a surface of the opening. The feedthrough
30 connections establish electrical connections between the transducer element on the transducer chip and the electronic circuit chip. This gives a high degree of freedom in designing both the transducer chip and the electronic circuit chip and in particular their electrical termina-
35 tions.

09122222 103030

External electrical connections can be established economically and reliably, and thermal stresses can be avoided with the small size solid state silicon-based condenser microphone of the invention.

5

The invention uses a separate integrated electronic circuit chip, preferably a CMOS ASIC (Application Specific Integrated Circuit) which can be designed and manufactured separately and independent of the design and manufacture of the transducer portion of the microphone. This is advantageous since the techniques and processes for manufacturing integrated electronic circuit chips are different from those used in manufacturing transducer elements, and each production stage can thus be optimised individually and independent of each other.

15

Brief description of the drawings

In the following the invention will be explained with reference to the drawings, in which:

20

Figure 1 is a cross section of a microphone according to the invention, and

25

Figure 2 is an enlarged view of a portion of the microphone in figure 1.

30

In the figures, for illustrative purposes, dimensions such as material thickness and mutual distances and possibly other proportions are not necessarily drawn to the same scale.

Detailed description of the invention

The illustrated microphone has the following structure. A silicon transducer chip 1 with a central opening etched therein carries a diaphragm 12 and a backplate 13 covering the central opening in the transducer chip. In this

35

09182553-103093

context the term "backplate" means a structural element which is relatively rigid as compared to the associated diaphragm, which in turn is relatively moveable. The backplate can be placed on either side of the diaphragm.

5 The transducer chip with the diaphragm 12 and a backplate 13 are preferably manufactured as described in the co-
pending Danish patent application PA 199800671. The
transducer chip 1 and a backchamber-chip 17 having a cav-
ity etched therein, and together the transducer chip 1
10 and the backchamber-chip 17 form a closed backchamber 11
with the diaphragm 12 forming one wall of the backchamber
11. The diaphragm 12 and the backplate 13 are both elec-
trically conductive or semi-conductive and are arranged
parallel and in close proximity to each other and with a
15 well defined air gap in between, so that they form an
electrical capacitor.

The backplate 13 has a plurality of perforations 19 mak-
ing it acoustically transparent, and the diaphragm has a
20 tiny vent hole 15 for equalising the static pressure on
both sides of the diaphragm.

An electronic circuit chip 3 having an integrated circuit
on a surface thereof is flip chip mounted with its cir-
25 cuit facing the transducer chip 1 and with an intermedi-
ate chip 2 between the transducer chip 1 and the elec-
tronic circuit chip 3. The intermediate chip 2 has a cav-
ity 10 and a first through going opening 4 and a second
through going opening 18 both communicating with the cav-
30 ity 10. The intermediate chip 2 is secured to the trans-
ducer chip 1 by means of an electrically conductive sol-
der ring 9 or by other means.

The electronic circuit chip 3 is secured to the interme-
35 diate chip 2 by means of an underfill material 6.

SECRET - 103098

The diaphragm 12 and the backplate 13 are electrically connected to respective ones of solder bumps 8, which connect the diaphragm 12 and the backplate 13 to electrical feedthrough conductors 14 on the surface of the cavity 10 and the opening 18 and further to the upper surface of the intermediate chip 2 where connections to the electronic circuit chip 3 are established via a conventional flip-chip interconnect method e.g. gold studs 7 with conductive adhesive. This is most clearly seen in figure 2.

The opening 4 is covered with a filter 5 or a flexible sheet or diaphragm of acoustically transparent material. The whole structure is encapsulated in a polymer encapsulation 16 leaving the filter 5 free.

The function of the above described structure is as follows. The opening 4 functions as a sound inlet, and ambient sound pressure enters through the filter 5 covering the opening 4 to the cavity 10 functioning as a front chamber for the microphone. Through the perforations 19 in the backplate 13 the sound pressure reaches the diaphragm 12. The cavity 11 functions as a backchamber for the microphone. The diaphragm 12 is movable relative to the backplate 13 in response to incident sound. When the diaphragm is moved in response to the incident sound, the electrical capacity of the electrical capacitor formed by the diaphragm 12 and the backplate 13 will vary in response to the incident sound. The circuit on the integrated circuit chip 3 is electrically connected to the diaphragm 12 and the backplate 13 via the electrical feedthrough conductors 14, and the circuit is designed to detect variations in the electrical capacity of the capacitor formed by the diaphragm 12 and the backplate 13. The circuit has electrical connections for electrically

connecting it to a power supply and other electronic circuitry in eg a hearing instrument.

5 In the illustrated embodiment the transducer element on the transducer chip is a condenser microphone with a diaphragm and a single backplate. In an alternative embodiment the transducer element has its diaphragm arranged between two backplates. Such a microphone can give balanced output signal which is less sensitive to electrical
10 interference.

SECRET 10303

What is claimed is:

1. A solid state silicon-based condenser microphone comprising

5

- a silicon transducer chip (1) including a backplate (13) and a diaphragm (12) arranged substantially parallel to each other, thereby forming an electrical capacitor, the diaphragm (12) being movable relative to the backplate (13) in response to incident sound,

10

- an integrated electronic circuit chip (3) electrically coupled to the transducer chip (1)

15

- an intermediate layer (2) fixing the transducer chip (1) to the integrated electronic circuit chip (3) in a spaced relationship, with the transducer chip (1) on a first side of the intermediate layer (2) and the integrated electronic circuit chip (3) on a second side of the intermediate layer (2) opposite the first side, the intermediate layer (2) having a first through going opening (4, 10) between its first side and its second side giving access of sound to the diaphragm.

20

25

2. A condenser microphone according to claim 1 wherein the intermediate layer (2) on a surface thereof has electrical conductors (14) electrically connecting the transducer chip (1) to the integrated circuit chip (3).

30

3. A condenser microphone according to claim 2 wherein the intermediate layer (2) has a second through going opening (18) with a surface on which the electrical conductors (14) electrically connecting the transducer chip (1) to the integrated circuit chip (3) are situated.

35

09182266-103098

4. A condenser microphone according to claim 1 wherein the opening (4) in the intermediate layer is covered with a film (5) sealing the opening (4) on the second side of the intermediate layer (2).

5

5. A condenser microphone according to claim 1 wherein a cavity (11) is provided in the transducer chip (1) on a side of the diaphragm (12) opposite the intermediate layer (2).

10

6. A condenser microphone according to claim 5 wherein the cavity (11) is a closed cavity.

15

7. A condenser microphone according to claim 2 wherein the integrated electronic circuit chip (3) has a surface including electronic circuits with said surface facing the intermediate layer (2).

20

8. A condenser microphone according to claim 1 wherein the intermediate layer (2) is a silicon-based chip.

SECRET - 103030

Abstract.

A solid state silicon-based condenser microphone comprising a silicon transducer chip (1). The transducer chip includes a backplate (13) and a diaphragm (12) arranged substantially parallel to each other with a small air gap in between, thereby forming an electrical capacitor. The diaphragm (12) is movable relative to the backplate (13) in response to incident sound. An integrated electronic circuit chip (3) or ASIC is electrically coupled to the transducer chip (1). An intermediate layer (2) fixes the transducer chip (1) to the integrated electronic circuit chip (3) with the transducer chip (1) on a first side of the intermediate layer (2) and the integrated electronic circuit chip (3) on a second side of the intermediate layer (2) opposite the first side. The intermediate layer (2) has a sound inlet (4) on the same side as the ASIC giving access of sound to the diaphragm.

650607" 69928760

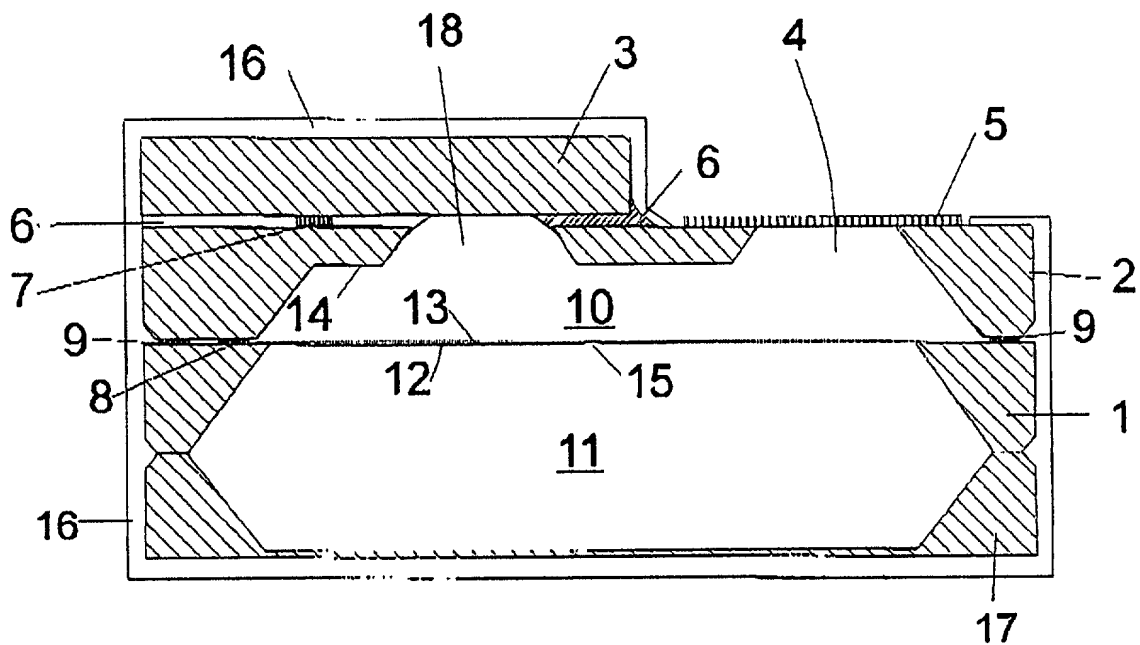


Fig. 1

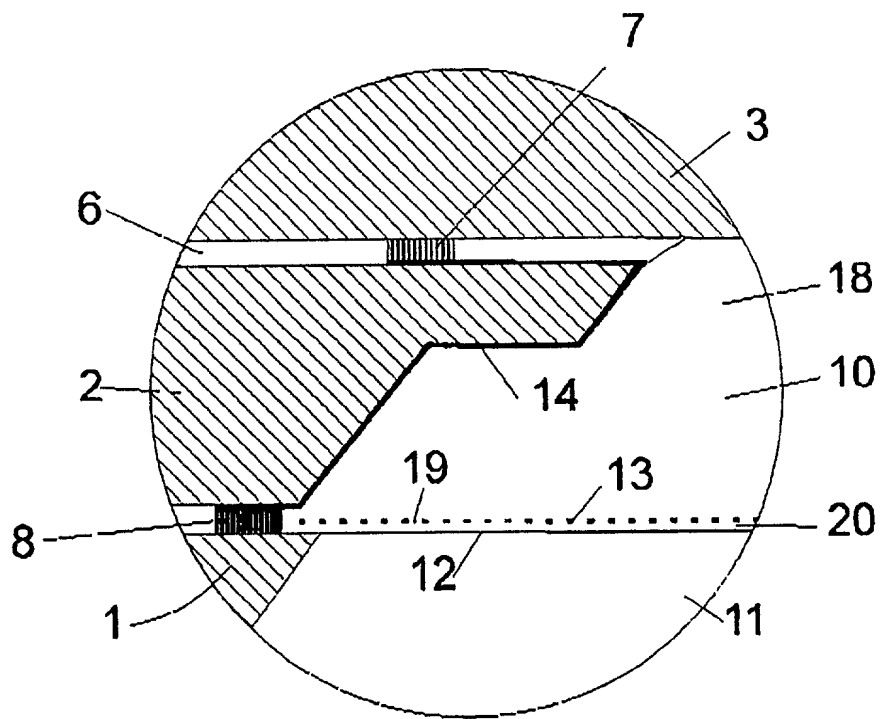


Fig. 2